



SE - 412

Patrol Boat 15 m


The 15m aluminium Patrol boat is intended to supervise an indicated sea water, escort other vessels and perform interventional operations. The wheelhouse is equipped with two crew seats nearby the control console and, located behind them, eight inspectors seats. The space below the deck is divided into four watertight compartments: machinery space, social space (with galley, sanitary unit and mess), spacious cabin dedicated to accommodate two regular crew members, and forepeak. To ensure comfort and suit crew expectations, the boat has been designed both to reach well maritime prowess and meet ergonomic and technical requirements.

Tanks capacity:

FO tanks volume: 3,44 m³, fresh water tanks volume: 0,55 m³, lubricating oil tank volume: 0,2 m³, sewage tank volume: 0,7 m³. Autonomy for 3 persons for 3 days.

Anchoring and mooring equipment:

One bower anchor HHP 30 kg, one spare anchor HHP 24 kg, with chain Ø 9 mm, one chain locker, one bow anchor pocket, one anchor-mooring winch electrically driven; 1 double towing bitt on fore, 4 double mooring bitts on sides. 4 cleats on sides.

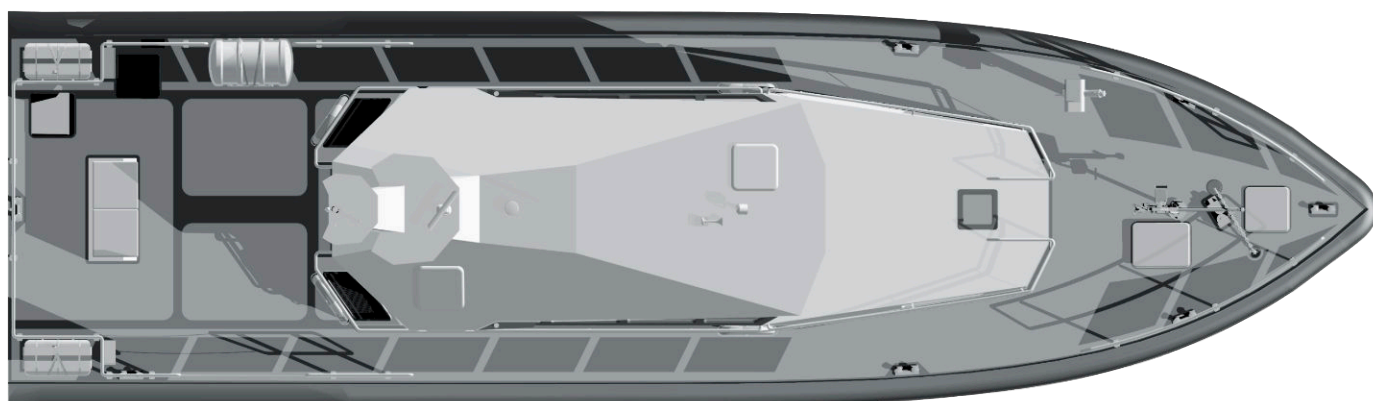

SE - 412

Patrol Boat 15 m

Principal characteristics

Length o.a.:	approx. 15,0 m
Breadth:	4,20 m
Moulded draught:	1,00 m
Engine power:	2 x 447 kW at 2 100 rpm
Propulsion:	fixed pitch propeller
Patrol speed:	16 kn
Maximum speed:	25 kn
Crew:	2 + 8 people

